


## ■ SPECIFICATIONS

Microphone Element	Dynamic microphone unit: Hyper cardioid
Modulation	Frequency modulation
RF Carrier Power	10mW
Modulation System	PLL synthesized
Channel Selectable	10banks, 24frequencies max/bank(the number of channels may differ from country to country)
Maximum Input Level	142dB SPL (microphone sensitivity:Gain"0")
Maximum Deviation	±40kHz
Audio Frequency Response	100Hz – 12kHz
Dynamic Range	110dB or more(with S5.5-RX)
Tone Frequency	32.768kHz
Battery	LR6(AA)
Battery Life	approx.8hours
Indicator	LCD display, Power lamp
Antenna	Built-in type
Function	Mute switch, Infra-Red link port, Battery life indicator(4 steps), Microphone sensitivity adjustment(Gain 0-2; 12dB)
Operating Temperature	-10°C to +50°C (14°F to 122°F)
Finish	Body: Aluminum, black, paint Head: Steel, black, paint
Dimensions	∅48 X 244.6 mm (∅1.89" X 9.63")
Weight	305g (0.67 lbs.) (with battery)
Accessory	Microphone holder W3/8"(with stand adapter)...1, Color ring(6 colors)...6

## ■ APPEARANCE

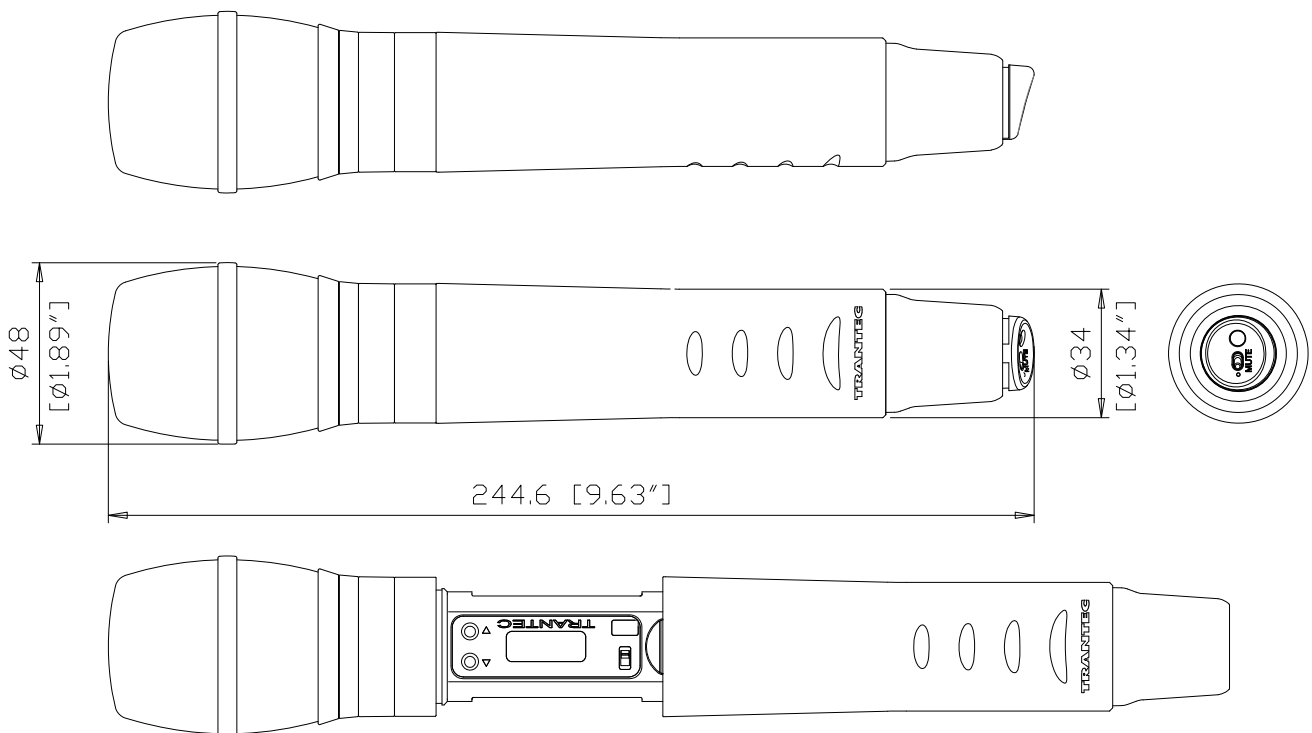

UNIT:mm SCALE:1/2